

SAF-ESCAPE Portable Fire Escape Ladder from Franklin Manufacturing, Inc.



STEEL CHAIN



SAFE ESCAPE, INC.
200 Weskora Road Yorktown Heights, NY 10598
• P 888-735-7522 • F 914-829-4433
SAFEESCAPE.COM

SAF-ESCAPE FIRE ESCAPE LADDERS PRODUCT SPECIFICATIONS

	<u>MODEL</u>	<u>LENGTH</u>	<u>HOOK SIZE</u>	<u>WALL THICKNESS</u>	<u>BOX DIMENSIONS</u>	<u>WEIGHT</u>	<u>STAND OFFS</u>
2 STORY	1015	15ft	9.5"	5 – 9.5"	120x410x620mm	16.5 lbs	5 sets
	1615	15ft	14"	10 - 14"	120x410x620mm	17.5 lbs	5 sets
	2015	15ft	18"	14 - 18"	120x410x720mm	17.5 lbs	5 sets
3 STORY	1025	25ft	9.5"	5 – 9.5"	120x410x620mm	23 lbs	8 sets
	1625	25ft	14"	10 - 14"	120x410x620mm	24.5 lbs	8 sets
	2025	25ft	18"	14 - 18"	120x410x720mm	24.5 lbs	8 sets
4/5 STORY	1045	45ft	9.5"	5 – 9.5"	150x410x620mm	36.5 lbs	15 sets
	1645	45ft	14"	10 - 14"	150x410x620mm	37.5 lbs	15 sets
	2045	45ft	18"	14 - 18"	150x410x720mm	37.5 lbs	15 sets

How Do I Measure my Wall Thickness

- 1 Measure distance A - the distance from the inside to the outside of the sill
- 2 Measure distance B & C the overhang of your windowsill at each side of the wall
- 3 Subtract B & C from A - this will give you your wall thickness

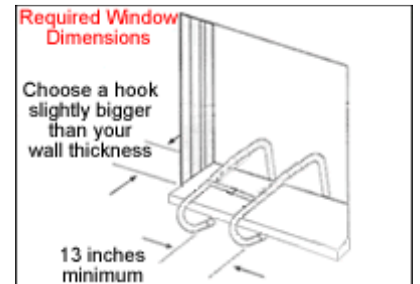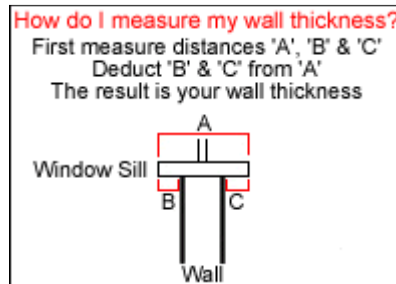

FACTS & FEATURES

- Window width should be a minimum of 13"
- Suitable for most standard windows
- 11.5 inch wide rungs
- Chain tension tested to 1000 pounds in weight
- Manufactured of heavy duty zinc plated 18 gauge steel
- Designed for quick & easy deployment with tangle free steel link chains
- Ladders store easily under bed or window
- Stand offs included to keep ladder away from building (quantity varies by model)
- Stand offs **MUST** be assembled by customer prior to use.
- Adjustable positioning of the stand offs can help avoid windows beneath.
- Ladders can be used more than once allowing for fire drills
- Limited Lifetime warranty